

LED Cabinet Light Strip




Model : CBL-P

Features:


- * Slim size 10mm(W)x13mm(H)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-fucntioned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:


- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate

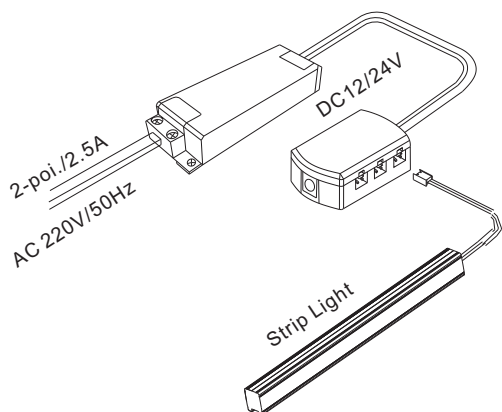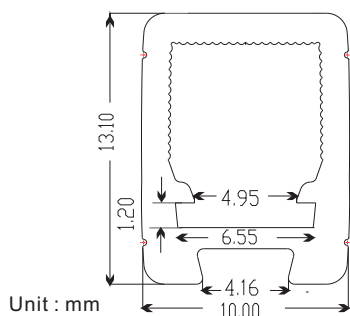


male plug



female socket



DC male plug

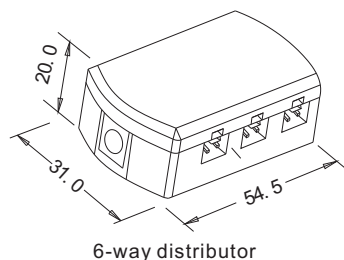

6-way distributor



Model:CBL-P

Standard

Standard Dim(mm)	10mm(W)*13mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	8W / M
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

LED Cabinet Light Strip

Model : CBL-P1010-S1008-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-functoned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:

- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate






Lighting Source

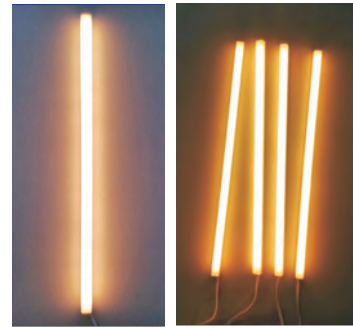


Model : CBL-P1010-S1008-89A

Standard


Standard Dim(mm)	10mm(H)*10mm(W) *1200mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	8W in 1m
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

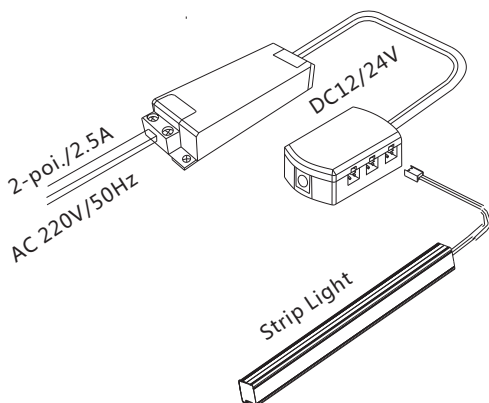


Description: male plug



Description: female socket



Description: DC male plug

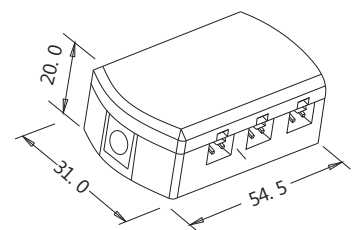

Description: 6-way distributor

LED Cabinet Light Strip

Model : CBL-P1010-S1012-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-functoned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:

- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate






Lighting Source

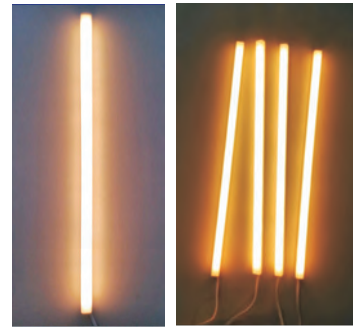


Model : CBL-P1010-S1012-89A

Standard


Standard Dim(mm)	10mm(H)*10mm(W) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	12W in 1m
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

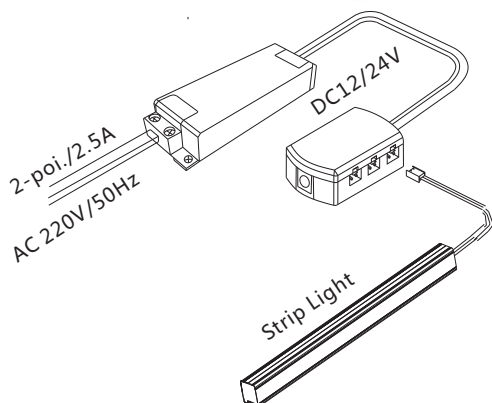


Description: male plug



Description: female socket



Description: DC male plug

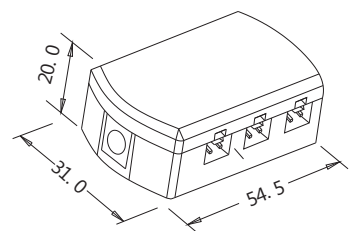

Description: 6-way distributor

LED Cabinet Light Strip

Model : CBL-P1010-S1210-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-functoned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:

- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate






Lighting Source

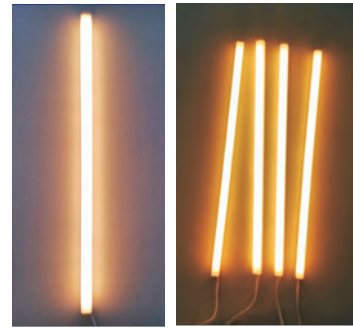


Model : CBL-P1010-S1210-89A

Standard


Standard Dim(mm)	13mm(H)*10mm(W) *1200mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	10W in 1.2m
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

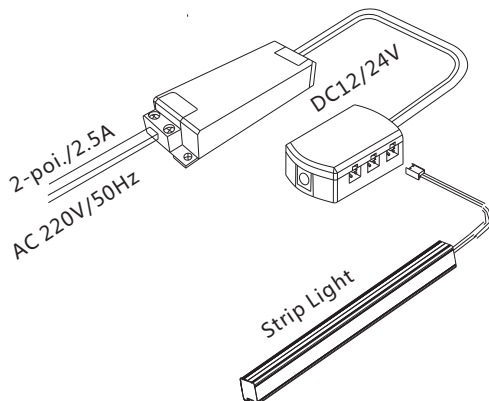


Description: male plug



Description: female socket



Description: DC male plug

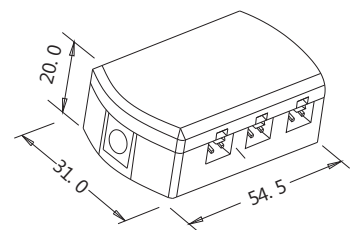

Description: 6-way distributor

LED Cabinet Light Strip




Model : CBL-P1013-S1010-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-functoned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:


- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate

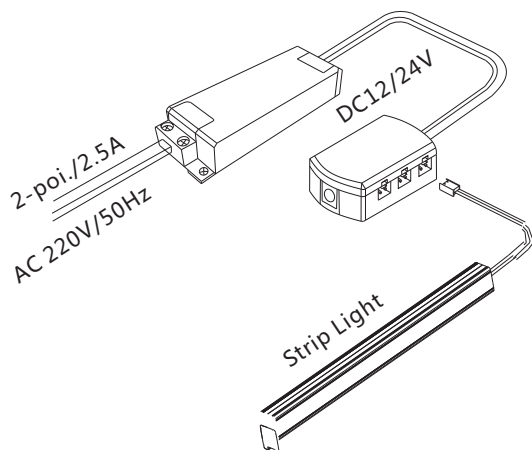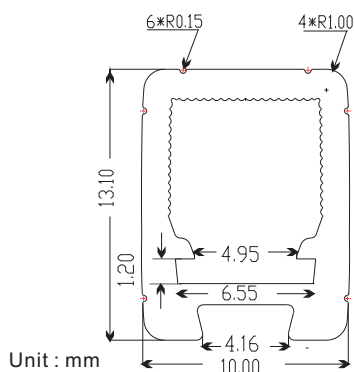


Description: male plug



Description: female socket



Description: DC male plug



Description: 6-way distributor

ILIGHTING
Green • Professional



Model : CBL-P1013-S1010-89A

Standard

Standard Dim(mm)	13mm(H)*10mm(W) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	10W in 1.2m
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

Lighting Source

LED Cabinet Light Strip

Model : CBL-P1013-S1210-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-functoned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:

- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate






Lighting Source

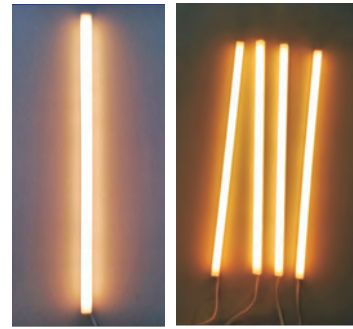


Model : CBL-P1013-S1210-89A

Standard


Standard Dim(mm)	13mm(H)*10mm(W) *1200mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	10W in 1.2m
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

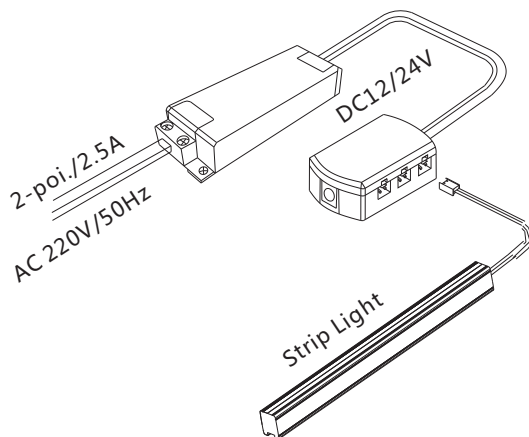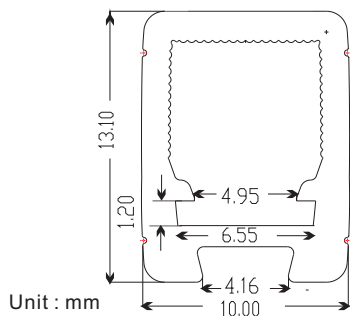


Description: male plug



Description: female socket



Description: DC male plug

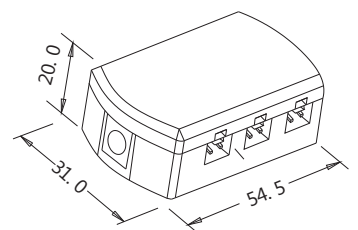

Description: 6-way distributor

LED Cabinet Light Strip




Model : CBL-P1117-S1010-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-fucntioned.
- * CRI > 93
- * High lumen output 100lm/w
- * Other options : dimmable & color temperature change

Application:


- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate

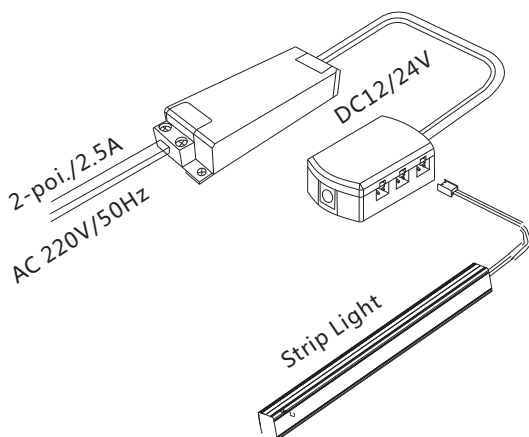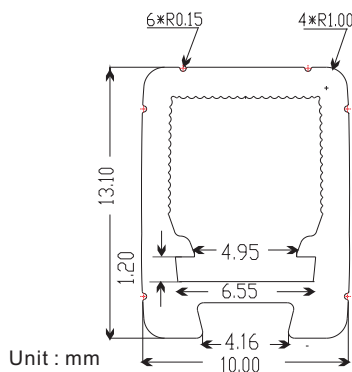


Description: male plug



Description: female socket



Description: DC male plug

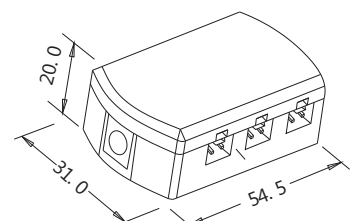

Description: 6-way distributor



Model : CBL-P1117-S1010-109A

Standard

Standard Dim(mm)	13mm(H)*10mm(W) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	10W in 1.2m
Voltage(V)	DC12V / 24V
Luminous Output	100 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

LED Cabinet Light Strip




Model : CBL-P1117-S1210-89A

Features:


- * Slim size 13mm(H)x10mm(W)
- * Exceptional even illumination (LED spot not seen)
- * 270 degree (3 - sectional) lighting output
- * Ideal for both direct or indirect light effect
- * Minimum cutting width < 3mm
- * Thermal conductive plastic to maximize heat dissipation
- * Installation in serial for seamless lighting output
- * SPM Design - power circuit protection to cut off individual LEDs when mal-functoned.
- * CRI > 93
- * High lumen output 80lm/w
- * Other options : dimmable & color temperature change

Application:


- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail chop
- * & many other applications as appropriate

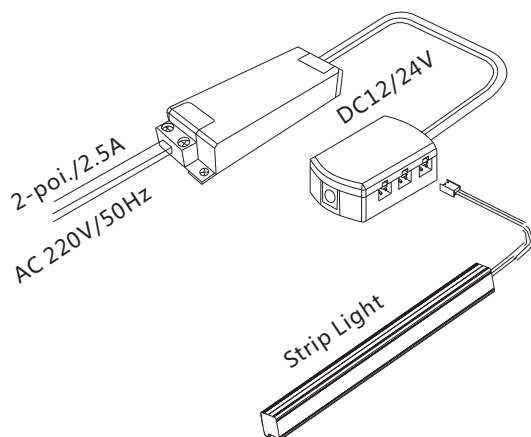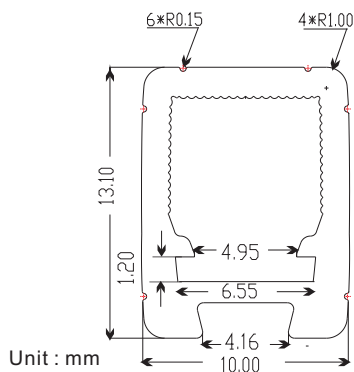


Description: male plug



Description: female socket



Description: DC male plug

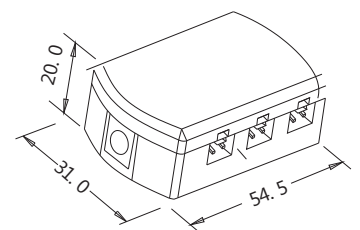

Description: 6-way distributor



Model : CBL-P1117-S1210-89A

Standard

Standard Dim(mm)	13mm(H)*10mm(W) *1200mm(L) (Length will be varied to suit cabinet size)
Material	Thermal Conductive Plastic
Power(W)	10W in 1.2m
Voltage(V)	DC12V / 24V
Luminous Output	80 lm/W
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K~6500K
CRI	≥93
IP Grade	IP54
Life Span	40000 hours
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

Model :CBL-A

Description




- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

Application:

- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail shop




Model :CBL-A

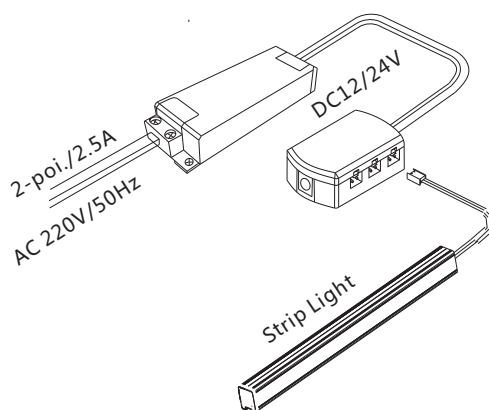


Standard


Size	10mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	9W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009




Description: male plug



Description: female socket



Description: DC male plug



Description: 6-way distributor

Model :CBL-A1013-S1000-89F

Description



- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

Application:

- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet
- * Retail shop





Model :CBL-A1013-S1000-89F




Standard


Size	10mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	9W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

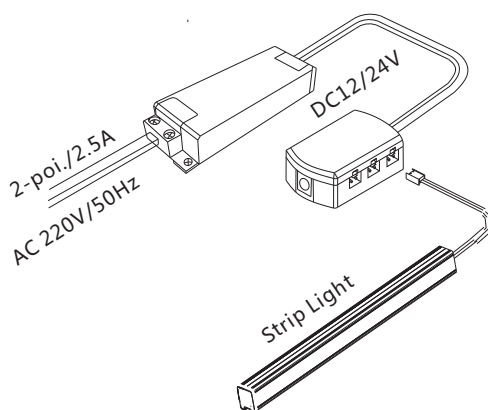


Description: male plug



Description: female socket



Description: DC male plug



Description: 6-way distributor

Model :CBL-A0809-S1000-89F


Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

Application:



- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet

Model : CBL-A0809-S1010-89F




Standard


Size	7.6mm(W)*9mm(H)*1000mm(L)
Material	AL6063+PC
Power	8W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

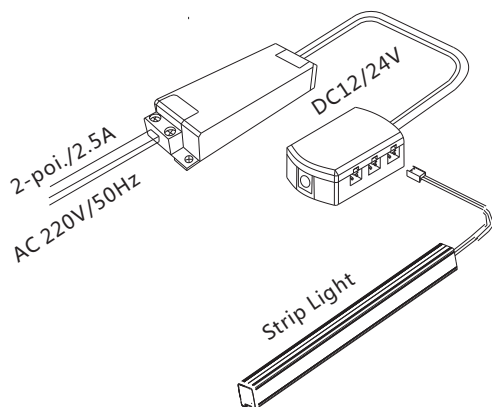


Description: male plug



Description: female socket



Description: DC male plug



Description: 6-way distributor

LED Cabinet Light Strip



Lighting Source

Model :CBL-A1013-S1010-89F

Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

Application:




- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet

Model : CBL-A1013-S1010-89F




Standard


Size	10mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	10W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.90
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

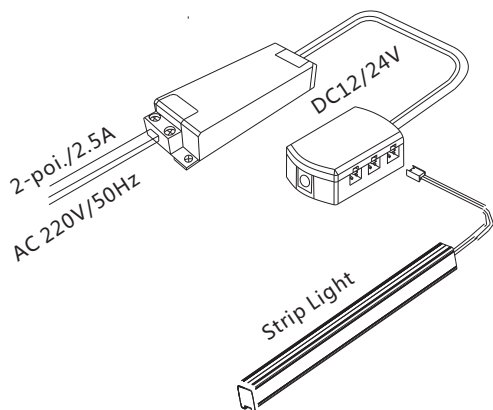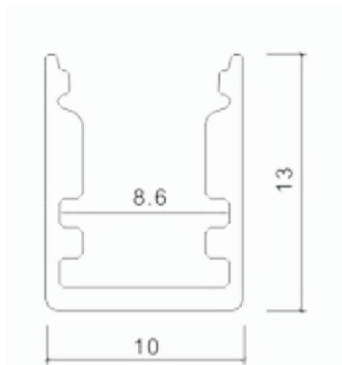


Description: male plug



Description: female socket



Description: DC male plug

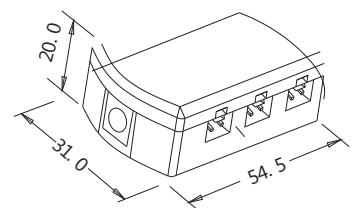

Description: 6-way distributor

LED Cabinet Light Strip



Lighting Source

Model :CBL-A1510-S1010-89F

Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

Application:




- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet




Model : CBL-A1510-S1010-89F

Standard


Size	15mm(W)*10mm(H)*1000mm(L)
Material	AL6063+PC
Power	10W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

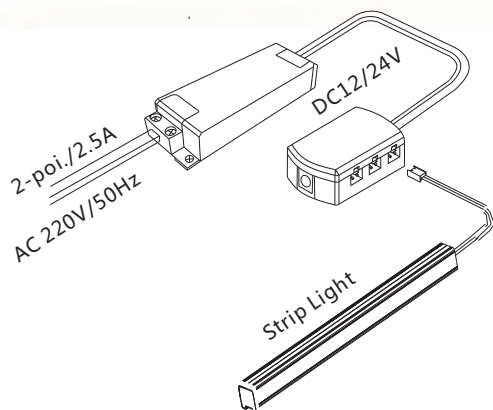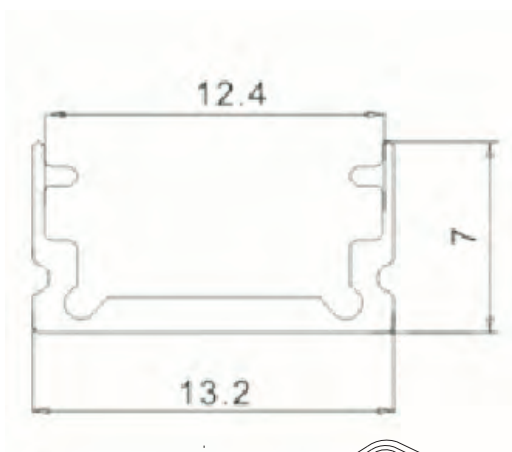


Description: male plug



Description: female socket



Description: DC male plug



Description: 6-way distributor

LED Cabinet Light Strip



Lighting Source

Model :CBL-A1713-S1010-89F


Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

Application:



- * Kitchen cabinet
- * Bathroom cabinet
- * Closet
- * Show cabinet

Model : CBL-A1713-S1010-89F

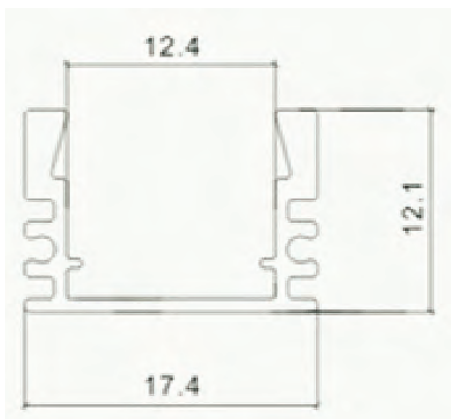


Standard


Size	17mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	10W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	100lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.90
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

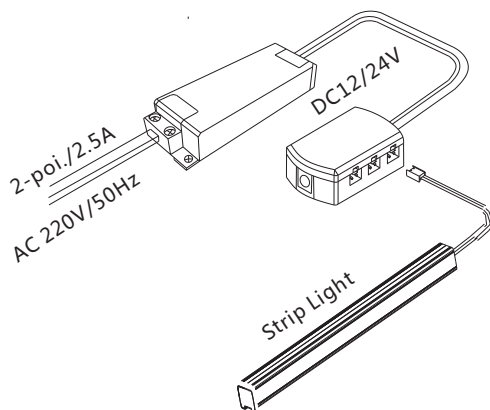


Description: male plug



Description: female socket



Description: DC male plug

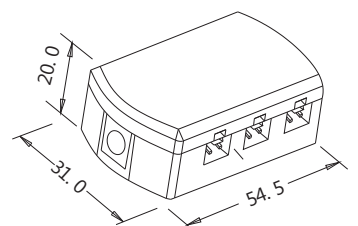

Description: 6-way distributor